

MBRP

MBRP Header Installation Instructions

3110700


2008-2014

Yamaha Nytro

Note: Local regulations may limit or prohibit modification to your snowmobile's emissions system and/or the sound levels that it generates. It is your responsibility to be aware of restrictions that may apply to your intended use of this product.

It is highly recommended you have your local Yamaha dealer or snowmobile shop install this system for you.

1. Remove the plastic panels and trim pieces located around the exit of the exhaust along with the tail light cover.
2. Remove the seat, side panels and the panel located above the gas tank.
3. Next, remove the gas tank and stock exhaust muffler, sliding it out the rear of the sled.
4. Remove the cover located above the stock header and remove the 2 bolts retaining the header along with the 3 clamps mounting the header to the stock flex couplings and slide out the rear of the sled.
Note: It may be necessary to remove the 2 suspension bolts closest to the rear to slide out the header.
5. Slide your new MBRP header in from the rear and reinstall to the 3 clamps (torque to 7ft-lbs) and the 2 bolts that mount the header (torque to 17ft-lbs).
6. Reassemble ensuring the gasket is in position on the outlet of the header.

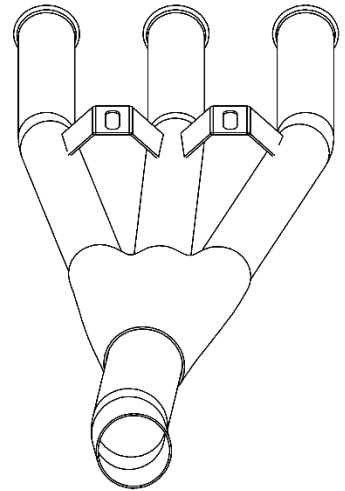

NOTE: To avoid exhaust leaks use a high heat silicone to seal all connections between the header and the muffler. Monitor the exhaust for leaks during the first 200 miles after your installation and re-apply silicone where necessary.

CAUTION: **DO NOT** touch the muffler while the snowmobile is running or shortly after it has run, as it may result in personal injury.

MBRP Ltd. warranty applies for a two (2) year period from the date of purchase to defects in product material and workmanship and is to the original purchaser on record and for the original vehicle for which it was designed and installed. This warranty is limited, at MBRP Ltd.'s sole determination, to the repair or replacement of defective product only and does not include the cost of removal or re-installation, damage by accident, abuse, misuse or misapplication or any consequential damages however they may arise. Determination of warranty coverage shall be at the discretion of an authorized MBRP Ltd. quality engineer.