



BX88154

Offset Triple Lug Kit Installation Instructions

Installation Instructions

Replace the existing connection ends on your tow bar with the offset triple lugs by following the instructions below.

1. Lay the tow bar on a work surface. Remove the existing connections.
2. Insert the offset triple lugs so that the UP decal is to the outside of the tow bar legs and the arrow is pointing the proper direction.
3. Insert the 1/2-13 x 2" hex bolt through the first hole of the pivot connection on the tow bar leg. Slide one 0.51 x .523 ID x 1.375 OD washer onto the bolt followed by the offset triple lug and another 0.51 x .523 ID x 1.375 OD washer onto the bolt. Push the bolt through the second hole of the pivot connection on the tow bar leg and install the 1/2-13 Essna jam nut (see Figure 2 for proper installation).
4. Using a 3/4" wrench to hold the bolt, tighten the nut with 3/4" wrench until the nut is secure but the offset triple lug is still able to pivot for easy hooking and unhooking of the tow bar.
5. The installation of the triple lug is complete. You can use the 1/2 x 2 5/8" pin and quick pin or locks to secure your tow bar to your baseplate. **DO NOT** substitute any other devices if the tow bar pins and clips are misplaced.

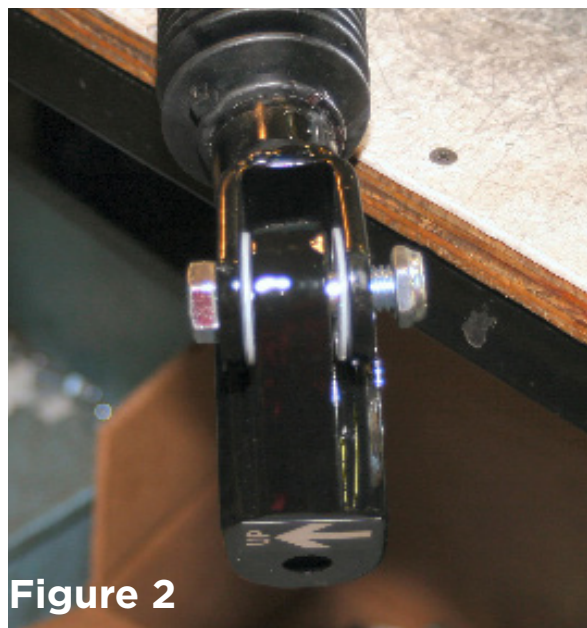


Figure 2

BX88154 Offset Triple Lug Kit Installation Instructions

Figure 1



Parts List

Ref. #	Part #	Qty.	Description
1	299-0736	2	Offset Triple Lug
2	290-0381	4	Washer, 0.51 x .523 ID x 1.375 OD
3	201-0645	2	1/2-13 x 2 Hex Bolt, Short Thread
4	202-0143	2	1/2-13 Essna Jam Nut, ZP
5	229-0520	2	Pin, 1/2 x 2 5/8 Eff.
6	62-3213	2	Quick Pin Assembly

Important:

Use only genuine factory replacement parts on your baseplate. Do **NOT** substitute homemade or non-typical parts. If a bolt is lost or in need of replacement, for your safety and the preservation of your baseplate, be sure to use a replacement bolt of the same grade (In most cases it will be Grade 5, please reference the parts list above). Replacement parts may be ordered through your nearest Blue Ox® Dealer or Distributor. Failing to follow and/or altering these installation instructions in either installation or required equipment will void the manufacturer's warranty. Towing behind a non-motorized vehicle will void the warranty.

CUSTOMER SERVICE COMMITMENT

Blue Ox® is committed to providing you with exceptional customer care throughout your lifetime with our products. Our team is here to assist you with any questions you may have regarding the performance of your product. Simply call (402) 385-3051 and you can speak with our customer care team.

Additionally, please visit our website to see which rallies our Destination America team will be attending. For a nominal fee, our service technician will service your towing system to ensure it's in proper working condition. Also, as a commitment to our customers, should you visit our factory, you can stay at our full service Blue Ox® campground at no charge along with enjoying a factory tour.

Again, thank you for being our customer and for the confidence you have shown in the performance of our products. It is because of customers like you we enjoy the success we have today.

© 2015 Blue Ox
One Mill Road, Industrial Park
Pender, Nebraska 68047
Phone: (402) 385-3051
Fax: (402) 385-3360
www.blueox.com