



INSTALLATION GUIDE

Baffled Oil Catch Can Fits 2022+ BRZ/GR86


SKU: MMBCC-BRZ-22

TABLE OF CONTENTS

- Pg 1** RESOURCES AND CONTACT INFORMATION
- Pg 2** EXPLODED VIEW
- Pg 3** IMPORTANT SAFETY INFORMATION
REQUIRED TOOLS
INSTALLATION INSTRUCTIONS
- Pg 4** DISPOSAL INSTRUCTIONS
WARRANTY INFORMATION

RESOURCES & CONTACT

-  **CALL 1-877-GOMISHI**
CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST
-  **MISHIMOTO**
-  **GOMISHIMOTO**
-  **MISHIMOTO**
-  **WEBSITE**
WWW.MISHIMOTO.COM
-  **ENGINEERING BLOG**
WWW.MISHIMOTO.COM/ENGINEERING

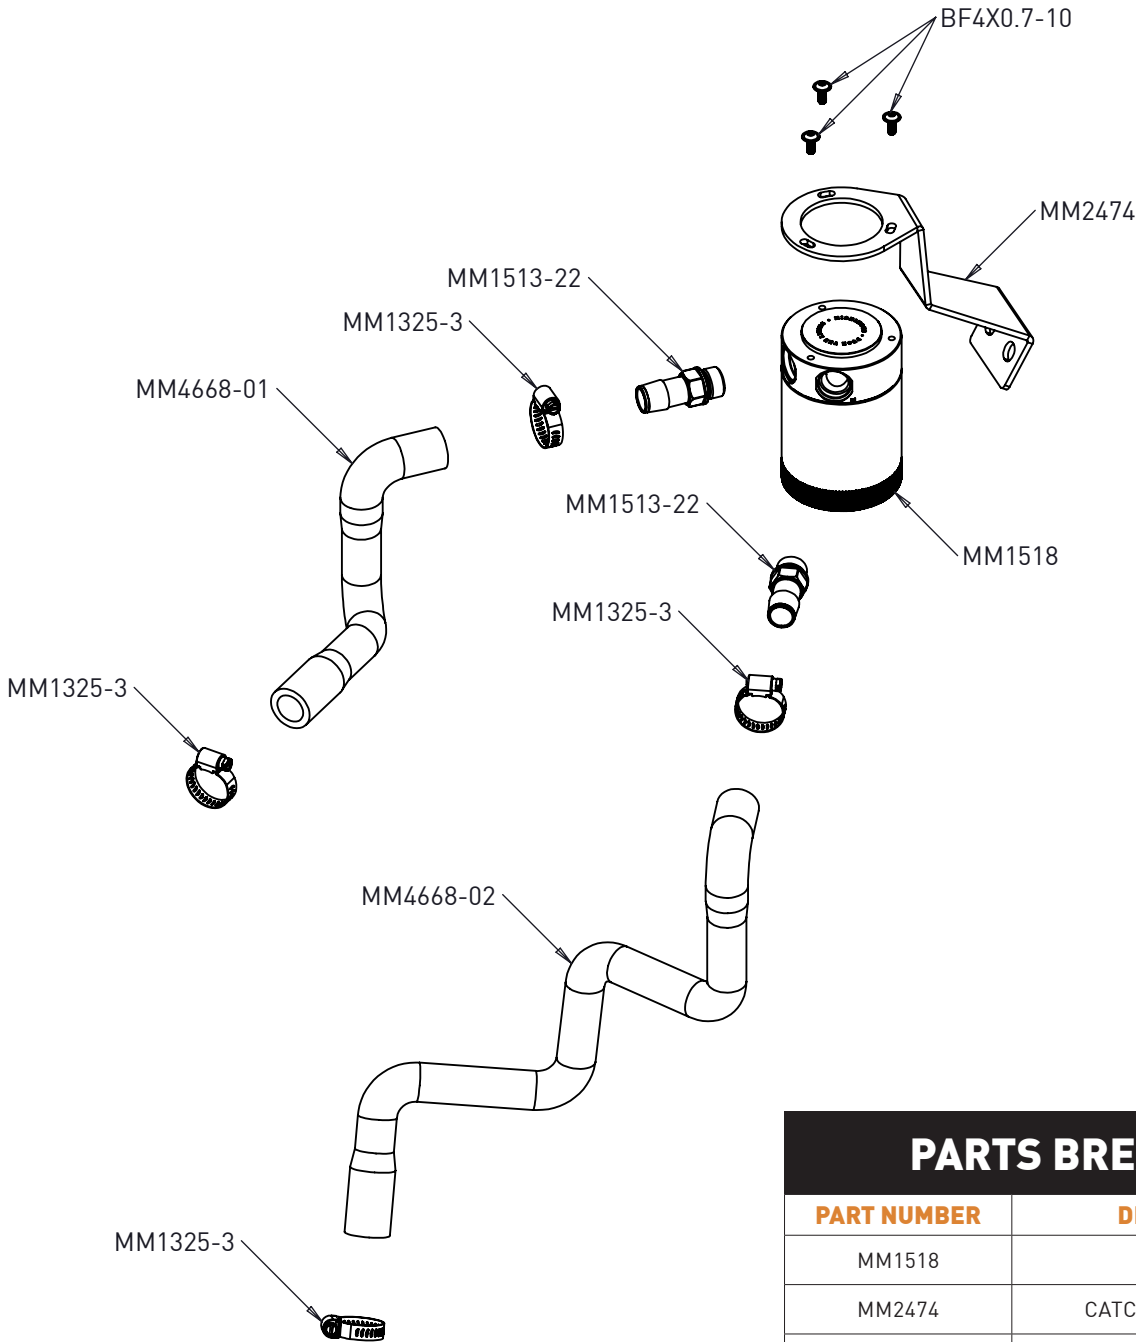

PARTS BREAKDOWN		
PART NUMBER	DESCRIPTION	QTY
MM1518	CATCH CAN	1
MM2474	CATCH CAN BRACKET	1
MM4668-01	HOSE 1 (TO MANIFOLD)	1
MM4668-02	HOSE 2 (TO PCV VALVE)	1
MM1513-22	CATCH CAN FITTING	2
BF4X0.7-10	M4 BOLT	3
MM1325-3	WORM GEAR CLAMP	4

IMPORTANT SAFETY INFORMATION

- › Mishimoto recommends you use safety glasses and protective gloves during the installation of our products
- › Raise vehicle only on jack stands or on a vehicle lift
- › Allow vehicle to cool completely prior to attempting installation
- › Do not run the engine or drive the vehicle while overheating; serious damage can occur
- › Please dispose of any liquids properly
- › Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- › If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

REQUIRED TOOLS

1/4" RATCHET	12MM SOCKET
1/4" SOCKET DRIVER	17MM DEEP SOCKET
7MM SOCKET	2.5MM ALLEN WRENCH


INSTALL TIME .5 HOURS

INSTALL DIFFICULTY


INSTALLATION INSTRUCTIONS

*Note: To avoid potential injury, wait for the engine to cool off before beginning installation.

- 01.** Remove the engine cover by lifting on each corner to release the pegs.

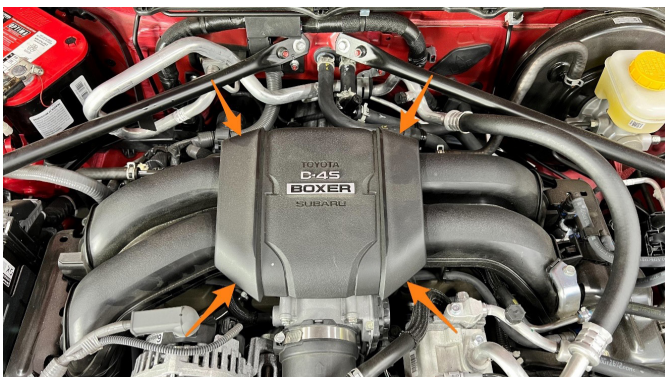


- 02.** Remove the stock PCV hose by pulling the ends straight off the manifold and engine block.

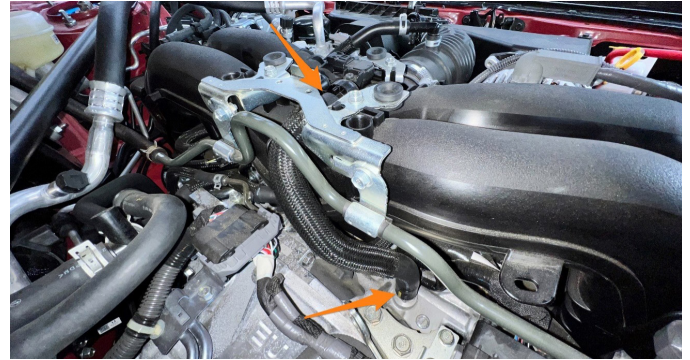

- 03.** Using a 12mm socket, remove the nut and bolt from the right strut brace on the firewall side.



- 04.** Mount the catch can as shown using the hardware removed in the previous step.

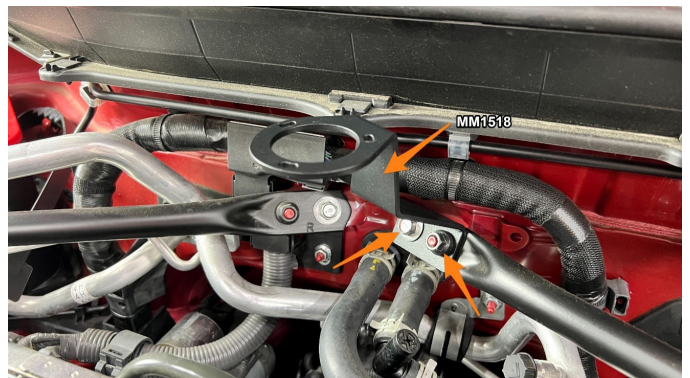


Continued on next page


05. Using a 17mm socket, install the two catch can fittings into the catch can.




06. Slide a worm gear clamp onto the end of each hose and install onto the catch can fittings as shown. Using a 7mm socket, loosely tighten the clamps.

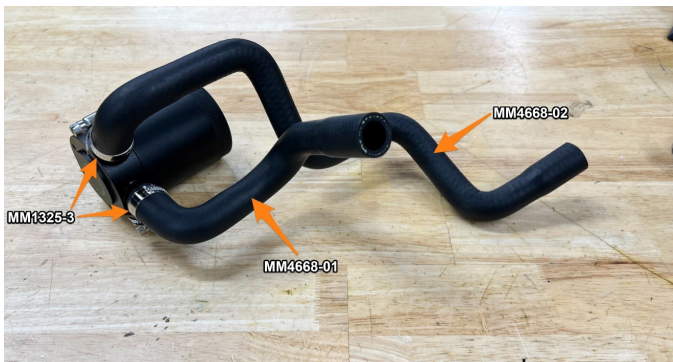


07. Using a 2.5mm Allen wrench, fasten the catch can to the bracket in the orientation shown using the three supplied M4 bolts.

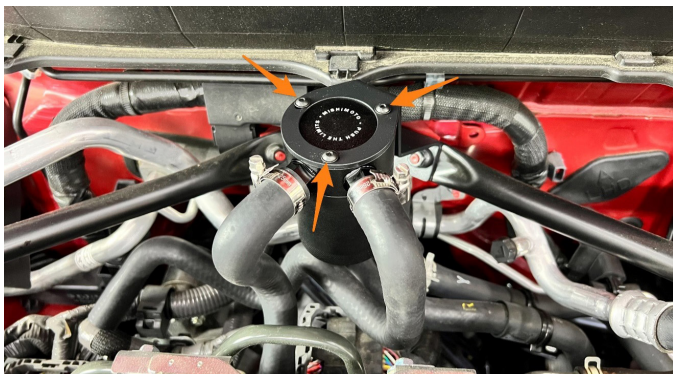

08. Slide a worm gear clamp over the short hose, then push the hose end onto the intake manifold fitting. Using a 7mm socket, tighten the clamp.

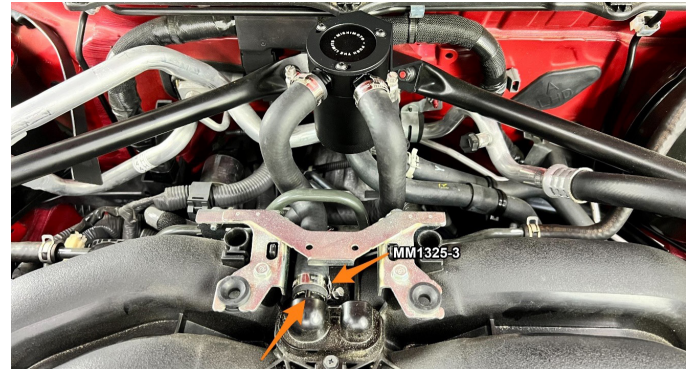

09. Slide a worm gear clamp over the long hose, then push the hose end onto the engine block fitting. Using a 7mm socket, tighten the clamp.

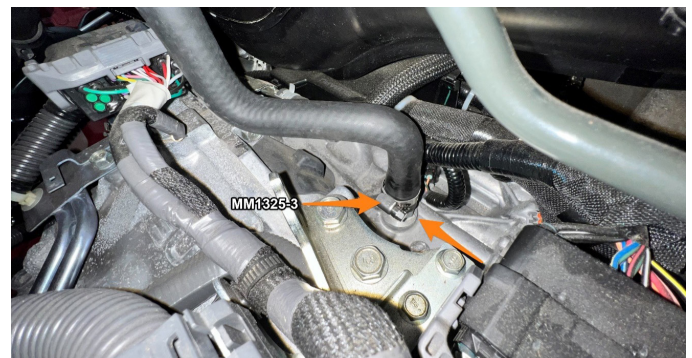

10. Fully tighten the hose clamps on the catch can. Reinstall the engine cover by lining up the pegs and pushing down on all 4 corners.



Congratulations! You have finished your installation.

DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals.

WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.

- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on [Mishimoto.com](https://www.mishimoto.com) in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.
- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



WARNING
Cancer and
Reproductive Harm
www.P65Warnings.ca.gov

This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit: www.p65warnings.ca.gov